


MONO 1500

**EMPOWERED
INNOVATION**

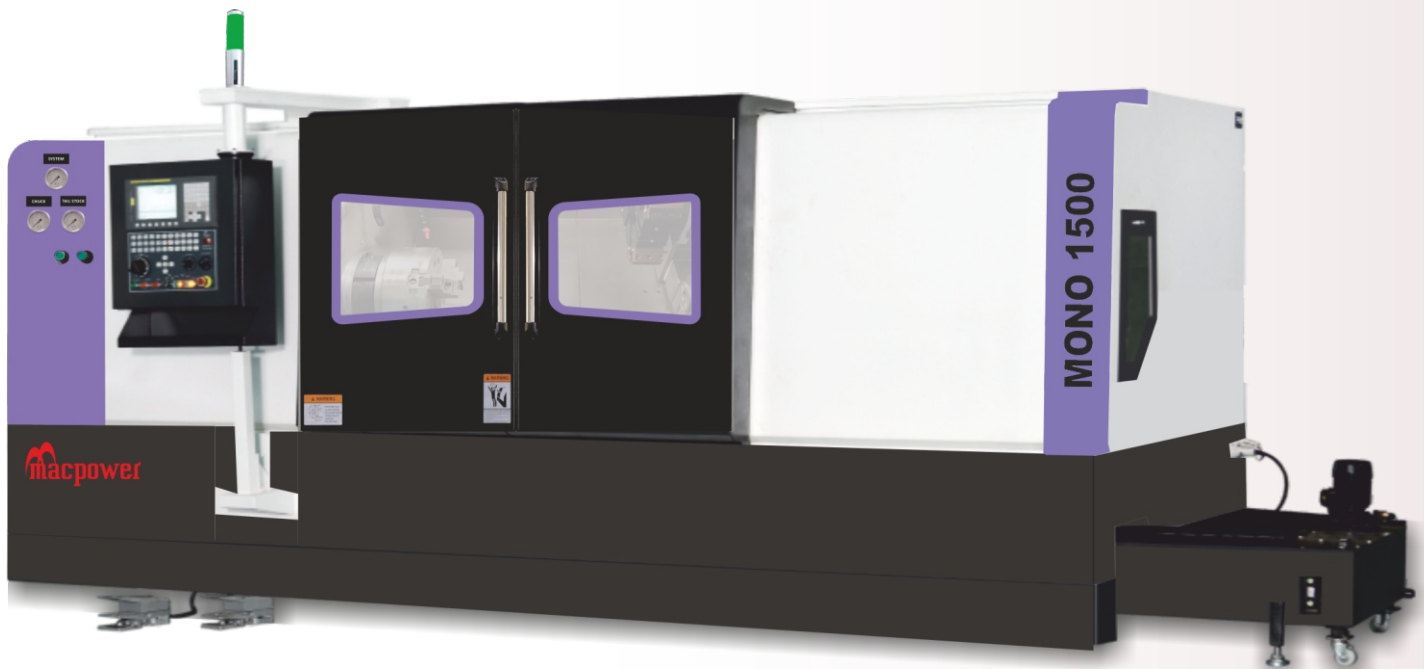

**LARGE
SERIES**

ONE NUMBER - MULTI SOLUTIONS

FOR SALES INQUIRIES & CUSTOMER CARE

96-1098-1098



TEXT


WWW.MACPOWERCNC.COM

MONO - 1500


MACHINE CONFIGURATIONS

DESCRIPTION	UNIT	MONO 1500
CAPACITY		
Swing Over Carriage	mm	Ø 350
Maximum Turning Dia. (Full Length)	mm	Ø 350
Swing Over Bed	mm	Ø 500
Maximum Turning Length	mm	1500
Distance Between Center	mm	1545
SLIDES		
Cross (X axis) Travel	mm	185
Longitudinal (Z axis) Travel	mm	1500
Rapid Feed (X axis)	m/min	20
Rapid Feed (Z axis)	m/min	20
MAIN SPINDLE		
Spindle Nose	-	A2-6
Spindle Bore	mm	Ø 63
Max. Bar Capacity	mm	Ø 51
Chuck Size	mm	Ø 200 x 3 Jaw
Speed Range	rpm	50 - 3500
Full Power Range	rpm	750 - 1750
Spindle Motor (Continues Rating)		
Spindle Motor (15min. Rating)	KW	11 / 15
TURRET		
Number of Stations	No.	8
Tool Size	mm	25 x 25
Max. Boring Bar Capacity	mm	Ø 40
TAIL STOCK		
Quill Tapper	-	MT 5
Quill Diameter	mm	Ø 80
Quill Stroke	mm	100
ACCURACY		
Positioning Accuracy	mm	0.008
Repeatability	mm	0.007
OTHER DATA		
Weight (Approx.)	kg.	-
Dimensions (W x D x H)(Approx.)	mm	4960x2295x2050
SYSTEM		
Fanuc	-	OI TF PLUS
Siemens	-	828 D



TOOL INTERFERENCE DIAGRAM

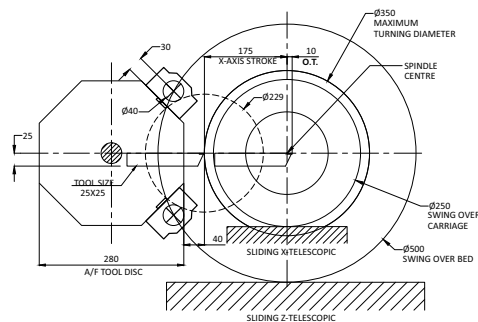


MACHINING RANGE

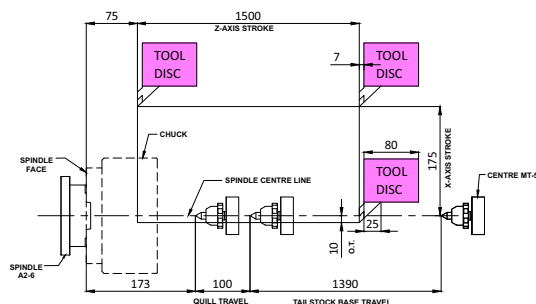

POWER DIAGRAM

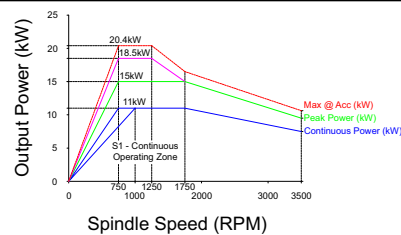

COMPONENTS

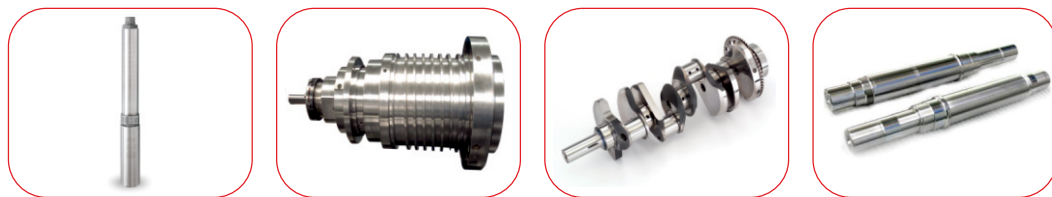

MACPOWER CNC MACHINES LIMITED

Regd. office address : Plot No. 2234, Near Kranti Gate, GIDC, Metoda - 360 021. Rajkot, Gujarat. (INDIA)

+91 2827 287930 / 31

sales@macpowercnc.com

www.macpowercnc.com



FOR MORE INFORMATION PLEASE CONTACT

WEST ZONE

Rajkot	:	93777 87930
Jamnagar	:	74860 42366
Surendranagar	:	74860 42366
Morbi	:	93777 87930
Bhavnagar	:	93777 87930
Ahmedabad	:	93775 87930
Sanand	:	93775 87930
Anand	:	93775 87930
Baroda	:	63560 02810
Halol	:	63560 02810
Surat	:	63560 02810
Vapi	:	63560 02810
Mumbai (C)	:	70964 55955
Mumbai (W)	:	93203 87930
Nasik	:	93713 87930
Aurangabad	:	93456 87930
Kolhapur	:	70690 11499
Pune	:	93210 87930
Ahmednagar	:	93210 87930

NORTH ZONE

Delhi	:	76000 10288
Faridabad	:	74860 29853
Ghaziabad	:	70690 75161
Noida	:	70690 75161
Gurgaon	:	72111 08487
Haryana	:	89504 69265
Sonipat	:	89504 69265
	:	72111 02818
Ludhiana	:	99886 93302
Mohali	:	99886 93302
Jaipur	:	72111 88869
Alwar	:	72111 88869
Jodhpur	:	72111 88869

EAST ZONE

Kolkata	:	93758 45361
Jameshpur	:	93758 45361

SOUTH ZONE

Hyderabad	:	72111 03869
Bangalore	:	72111 03869
Chennai	:	63560 02822
Belgaum	:	91641 02610
Coimbatore	:	72111 02822
Trichy	:	72111 02822
Kerala	:	72111 02822

CENTRAL ZONE

Indore	:	99747 97756
Bhopal	:	87706 96570